

X-ECO 2415T 2x9000 Btu + 12000 Btu TRIAL INVERTER

COOLING

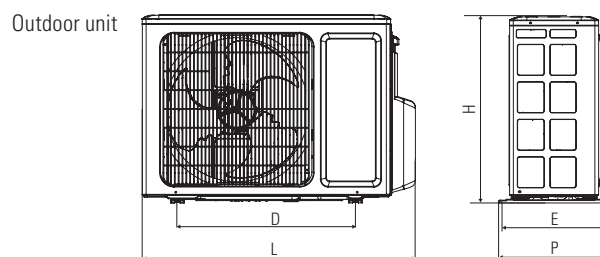
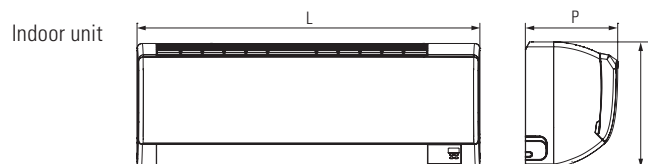
++

HEATING

+

CLASSE A
CLASSE A


Code	07010365	
Model	XECO-2415T	
Size	kBtu/h	24 (9 + 9 + 12)
P Design in Cooling ⁽¹⁾	kW	7,1
Energetic Efficiency Class in Cooling		A++
SEER		6,1
Annual electric consumption in Cooling	kWh/y	407
Climatic design area in Heating		Average
P Design in Heating ⁽²⁾	kW	7,0
Energetic Efficiency Class in Heating		A+
SCOP		4,0
Annual electric consumption in Heating	kWh/y	2450
Cooling capacity ⁽³⁾ nom (min-max)	kW	7,10 (2,29 - 8,50)
Cooling Absorbed power ⁽³⁾ nom (min-max)	kW	2,15 (1,00 - 2,87)
Heating capacity ⁽⁴⁾ nom (min-max)	kW	8,50 (3,66 - 8,79)
Heating absorbed power ⁽⁴⁾ nom (min-max)	kW	2,25 (1,10 - 2,87)
Supply voltage	V/ph/Hz	230/1/50
Maximum current absorbed	A	12,7
Refrigerant load R410A (GWP = 2088) / CO ₂ eq.	kg / t	2,2 / 4,59
Max. distance between I.U. and E.U.	m	20
Max. height between I.U. and E.U.	m	10
Max. height between I.U. and I.U.	m	10
Refrigerant piping (Liquid)	Ø mm (inch)	3x6,35 (1/4")
Refrigerant piping (Gas)	Ø mm (inch)	3x9,52 (3/8")
Model Outdoor unit	XECO-2415TE	
Cooling operating field	°C	-15÷43
Heating operating field	°C	-20÷24
Air flow	m ³ /h	4000
Sound power level	dB(A)	65
Sound pressure level ⁽⁵⁾	dB(A)	43
Compressor type		Rotary
IP grade of protection		IP24
Outdoor unit dimensions (mm)	LxHxPxDe	999x790x427x610x395
Outdoor unit weight	kg	68
Model Indoor Unit	XECO-0915W	
Cooling capacity ⁽¹⁾ nom (min-max)	kW	2,70
Dehumidification ⁽¹⁾	L/h	0,8
Heating capacity ⁽³⁾ nom (min-max)	kW	3,10
Maximum power absorbed	W	30
Maximum current absorbed	A	0,18
Air flow (max-min)	m ³ /h	600-520-370-280
Sound power level (max-min)	dB(A)	55-53-44-38
Sound pressure level (max-min) ⁽⁶⁾	dB(A)	38-35-27-21
IP grade of protection		IP20
Indoor unit dimensions	LxHxP mm	770x283x207
Indoor unit weight	kg	9
Model Indoor Unit	XECO-1215W	
Cooling capacity ⁽¹⁾ nom (min-max)	kW	3,50
Dehumidification ⁽¹⁾	L/h	1,4
Heating capacity ⁽³⁾ nom (min-max)	kW	3,80
Maximum power absorbed	W	30
Maximum current absorbed	A	0,18
Air flow (max-min)	m ³ /h	680-560-410-300
Sound power level (max-min)	dB(A)	56-53-45-39
Sound pressure level (max-min) ⁽⁶⁾	dB(A)	39-36-28-22
IP grade of protection		IP20
Indoor unit dimensions	LxHxP mm	770x283x207
Indoor unit weight	kg	9


⁽¹⁾ **Cooling** P design: internal temperature = 27(19) °C; external temperature = 35 °C.

⁽²⁾ **Heating** P design: internal temperature = 20 °C; external temperature = -10 °C.

⁽³⁾ **Cooling** standard nominal conditions: internal temperature = 27(19) °C; external temperature = 35 °C.

⁽⁴⁾ **Heating** standard nominal conditions: internal temperature = 20 °C; external temperature = 7 °C.

⁽⁵⁾ Sound pressure level measured (in open space) at a distance of 5 m from the unit and with directional factor equal to 2.

⁽⁶⁾ Sound pressure level measured (in closed space) at a distance of 3 m from the unit and with directional factor equal to 2 and with constant room equal to 300 m².



Ventilation

Three speeds available plus automatic.



Cooling



Heating



DRY Dehumidification

To reduce relative humidity without turning the temperature down too much.



AUTO Automatic operation

This selects the operating mode based on pre-set parameters to provide the room with conditions of utmost comfort.



Digital clock

Visualization of the clock from the remote control.



TIMER Timer setting

To preset the startup and the shutdown of the air conditioner.



Anti-dust filter

The indoor unit is equipped with a purification filter of the dust.



Compressor maintenance

To ensure a longer compressor lifetime, we have equipped the compressor with a start and stop controller. Waiting time between stop and start is three minutes



Remote control

Liquid crystal display (LCD) with clear indication of functions.



Remote control functions block

To block all the functions directly from the remote control.



AIRSWING

Automatic movement of the vertical flap

Automatic adjustment of the vertical air flow direction.



I Feel function

The real perceived room temperature from the remote control is sent to the infrareds receiver of the internal unit which will set it automatically.



Wire remote control

Standard connection with cable length mt 8.



SLEEP Night-time setting

To maintain optimum temperature during sleep periods.



Turbo function

To cool or heat the room intensely.



Blow function

Fan runs when unit is stopped to prevent generation of mould and odors inside indoor unit.



TEMP function

When the TEMP symbol is displayed the internal temperature of the room is showed for 5 seconds.



Double temperature range

It allows to set/visualize the temperature in °C or °F.



AUTORESTART Automatic restarting

To automatically restart the system after an interruption of the power supply.



AUTODIAGNOSIS Maintenance

It indicates any functioning problems.



Wire remote control functions block

To block all the functions directly from the wire remote control.



Water drainage pump

Water upwards drainage mechanism creates the ideal solution to assure a perfect water drainage, it offers more flexibility to the installation.



Ventilation Four delivery openings

The internal unit has four air delivery openings. The air flow direction is adjusted by four baffles.



Dual flow

The unit foresees 2 options for the air flow management. Upper mode or upper + lower mode.



Ionizer

Air conditioners are equipped as standard with Cold Plasma system which assures an air sterilization above the 95% together with the smell eliminationnegative ions.



Manual movement of horizontal deflector

To manually adjust air flux horizontally.



Multi-speed fan

Other speed settings are available (the number within the symbol indicates the quantity).

